

FLAMMEX



Mixed blade Hydraulic Cutters Mixed blade Hydraulic Cutters CHM 205 CXT / 275 CXT / 2050 CXT / 2750 CXT



Optimised cutters for cutting automobile profiles.

DESCRIPTION


High resistant light alloy unit with anti-wear treatment.
Can be used in an aquatic zone.

Tool comprises of :

- 1 Double acting cylinder.
- 1 Ergonomically shaped operating handle with a built in safety feature.
Automatic locking mono coupling with flat faced pre-centering cone and metallic protection cap
- 2 straight and curved high resistant forged steel blades with anti-corrosion treatment.
- 1 U type holding handle.

OPTION :

Adjustable carrying handle

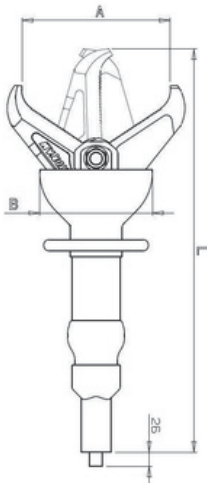

CHARACTERISTICS

| Model | CHM 205 CXT | CHM 275 CXT | CHM 2050 CXT | CHM 2750 CXT |
|------------------------------|---------------|----------------|---------------|----------------|
| Operating pressure | 700 bar | 700 bar | 700 bar | 700 bar |
| Cutting force | 694 kN | 694 kN | 950 kN | 950 kN |
| Depth of cut | 175 mm | 154 mm | 175 mm | 154 mm |
| Maximum opening A | 205 mm | 276 mm | 205 mm | 276 mm |
| Dimensions (mm) | 764x224x177 | 779x259x212 | 774x224x177 | 791x259x212 |
| Weight | 14,9 kg | 13,56 kg | 16.9 kg | 15,86 kg |
| Tool classification EN 13204 | CC 205-H/14,9 | CC 130-H/13,56 | CC 205-H/16.9 | CC 130-H/15,86 |